




NTK BEARING PRECISION AXLE CORP.

INA TASE25-N bearing units

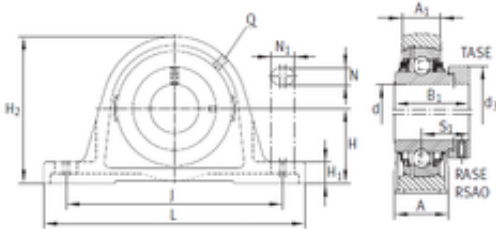

TASE25-N Bearing 2D drawings and 3D CAD models

Bearing No. TASE25-N

Bore Diameter	25 mm
d	25 mm
S1	27 mm
Thread (Q)	Rp1/8
d3	37,5 mm
A	36 mm
A1	21 mm
B1	44,5 mm
H	36,5 mm
H1	14,5 mm
H2	70 mm
J	103 mm
L	130 mm
N	11 mm
N1	19 mm
Weight	0,75 Kg
Basic dynamic load rating (C)	14 kN
Category	Pillow Block Bearings
Inventory	0.0
Manufacturer Name	SCHAEFFLER GROUP
Minimum Buy Quantity	N/A
Weight / Kilogram	0.874
Product Group	M06110
Number of Mounting Holes	2
Mounting Method	Eccentric Collar
Housing Style	2 Bolt Pillow Block



NTK BEARING PRECISION AXLE CORP.

Rolling Element	Ball Bearing
Housing Material	Cast Iron
Expansion / Non-expansion	Non-expansion
Relubricatable	Yes
Insert Part Number	GE25KPPB3
Seals	Double Triply
Housing Configuration	1 Piece Solid
Inch - Metric	Metric
Other Features	Single Row Radial Standard Shaft Height Metric With Set Screw
Long Description	2 Bolt Pillow Block; 25MM Bore; 36.5MM Base to Center Height; Eccentric Collar Mount; Ball Bearing; 95.3MM Minimum Bolt Spacing; 114.3MM Maximum Bolt Spacing; Relubricatable; Cast Iron; Double Triply;
Category	Pillow Block
UNSPSC	31171511
Harmonized Tariff Code	8483.20.40.40
Noun	Bearing
Keyword String	Pillow Block
Manufacturer URL	http://www.ina.com
Manufacturer Item Number	TASE25
Weight / LBS	1.985
Nominal Bolt Center to Center	4.1 Inch 105 Millimeter
Base to Center Height	1.437 Inch 36.5 Millimeter
Length Thru Bore	1.748 Inch 44.4 Millimeter
Bolt Spacing Maximum	4.5 Inch 114.3Millimeter
Bolt Spacing Minimum	3.752 Inch 95.3Millimeter
Bore	0.984 Inch 25 Millimeter