





NTK BEARING PRECISION AXLE CORP.

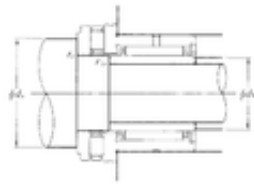

20 mm x 37 mm x 20 mm NTN
NKXR25T2+IR20 x 25 x 20 complex bearings

Bearing No. NKXR25T2+IR20 x 25 x 20

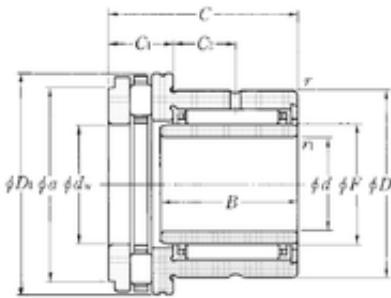

NKXR25T2+IR20 x 25 x 20 Bearing 2D drawings and 3D CAD models

Bore Diameter	20 mm
Outer Diameter	42 mm
d	20 mm
d1	25 mm
F	25 mm
D	37 mm
D1	42 mm
B	20 mm
C	30 mm
ra1 max.	0,3 mm
r min.	0,6 mm
r1 min.	0,3 mm
C1	11 mm
da min.	39 mm
db min	22 mm
ra max.	0,6 mm
C2	9,5 mm
Weight	0,155 Kg
Dynamic load rating radial (C)	14,2 kN
Dynamic load rating axial (C)	27,3 kN
Static load rating radial (C0)	24 kN
Static load rating axial (C0)	68 kN
(Grease) Lubrication Speed	1800 r/min